
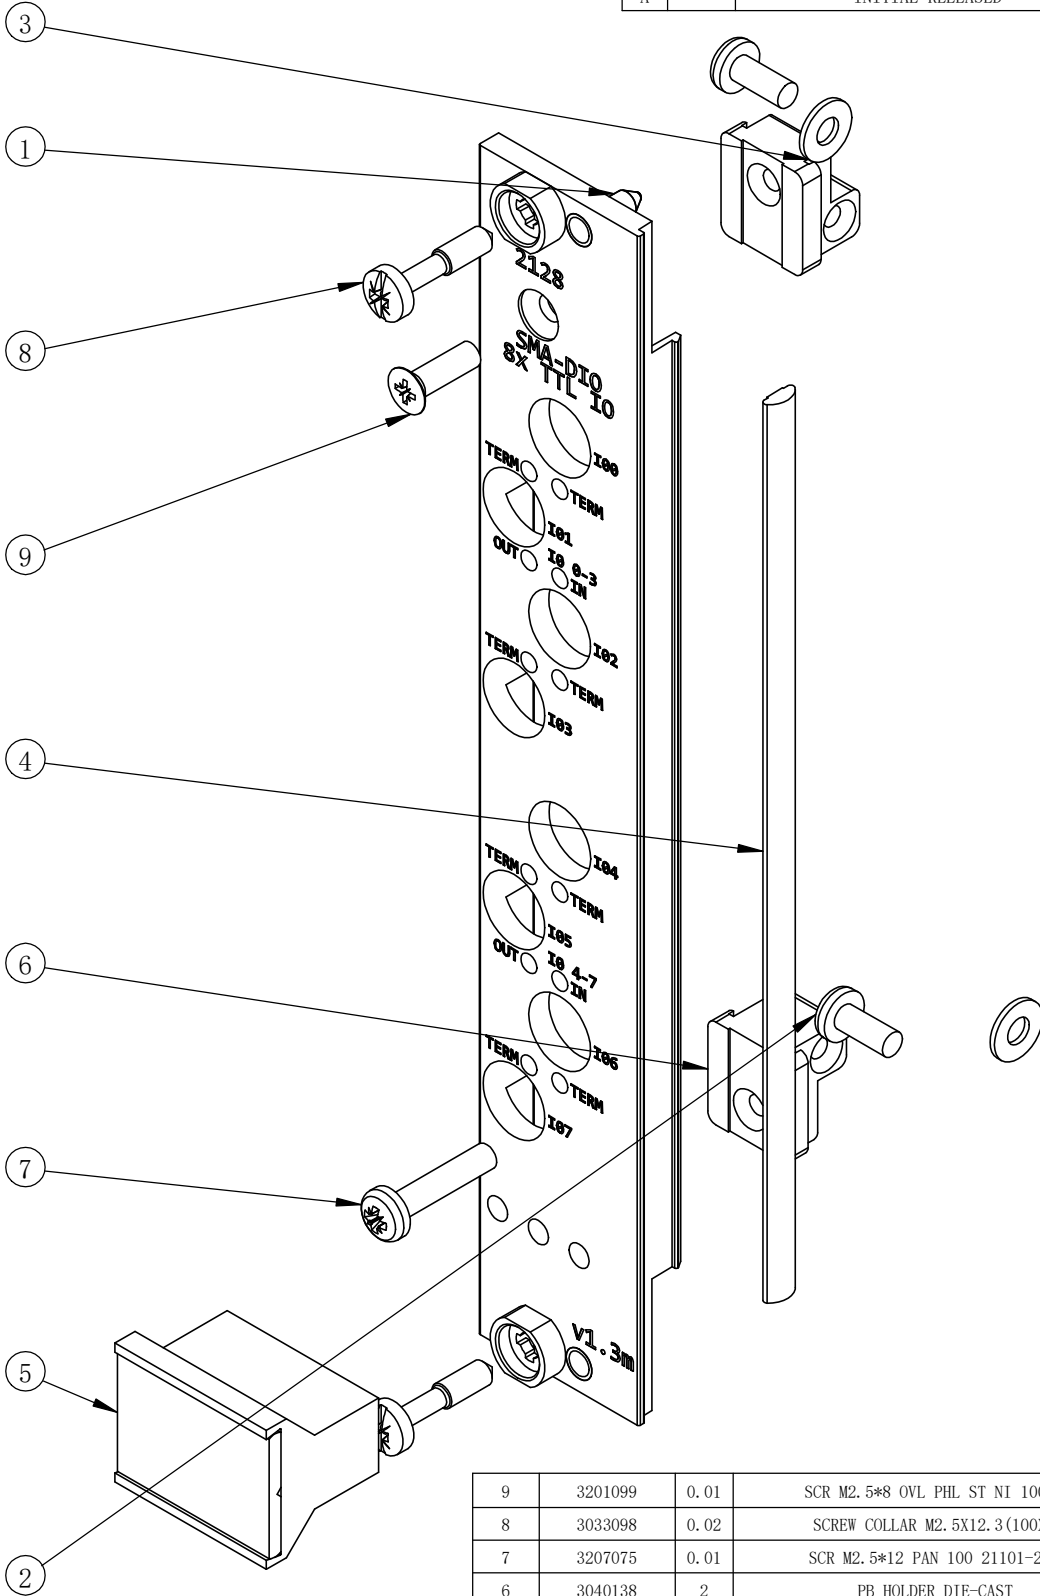
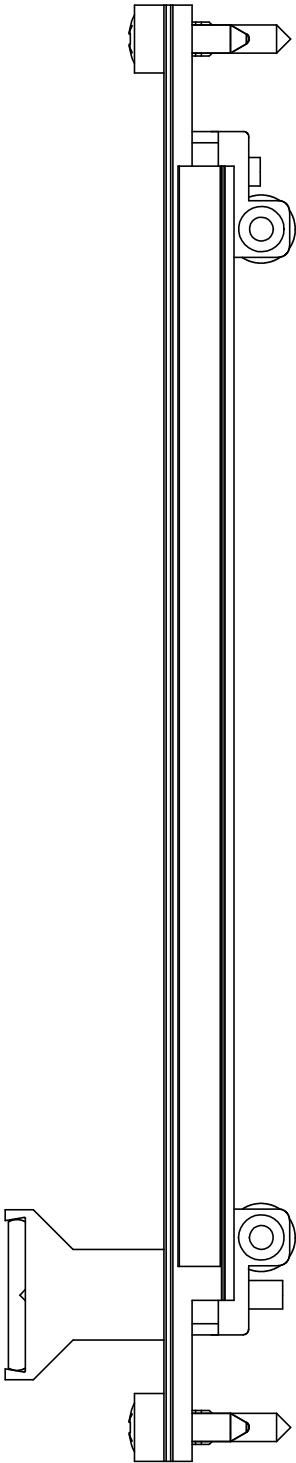


REVISION HISTORY - ALL SHEETS ARE THE SAME REV STATUS			
REV	ZONE	REVISION DESCRIPTION	ECN CODE
A		INITIAL RELEASED	

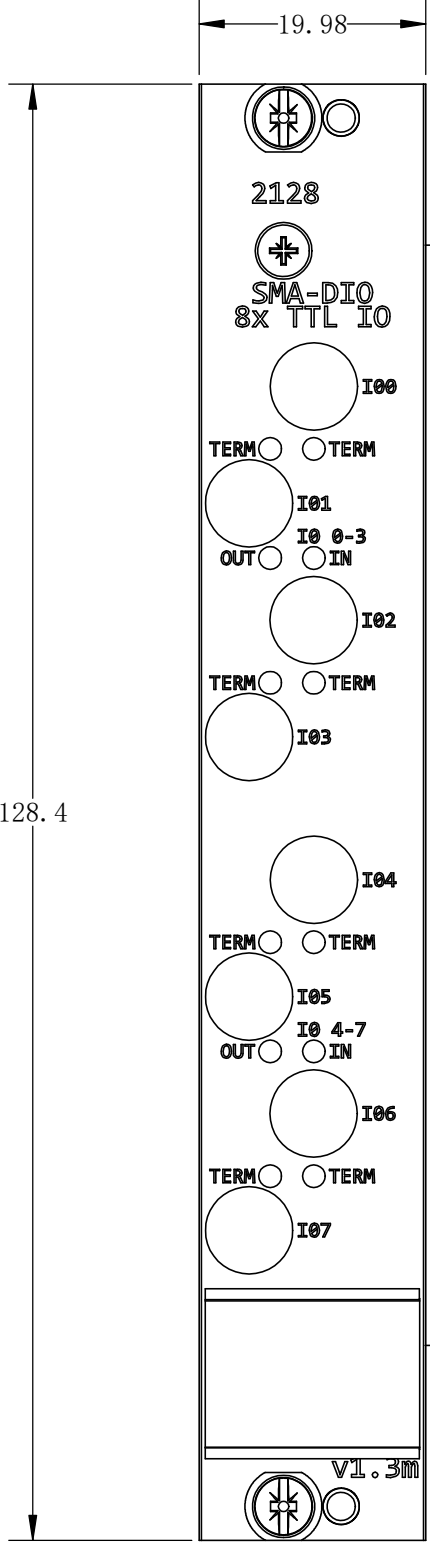

9	3201099	0.01	SCR M2.5*8 OVL PHL ST NI 100EA	
8	3033098	0.02	SCREW COLLAR M2.5X12.3(100X)	
7	3207075	0.01	SCR M2.5*12 PAN 100 21101-221	
6	3040138	2	PB HOLDER DIE-CAST	
5	3040012	1	HANDLE 4HP GREY PLASTIC	
4	3010124	0.1	EMC GASKET FABRIC 3U (10PCS)	
3	3010110	0.02	WASHER PLN.M2.7 DIN125(100X)	
2	3001012	2	SCR M2.5*6 PAN PHL NI DIN7985	
1	90531967	1	FP-LYKJ 3U4HP PANEL	
INDEX	PART NUMBER	QTY	DESCRIPTION	Note

BILL OF MATERIAL

Project Name:	FP	Finish:	
Scale:	3:2	Material:	NA THK: mm
Description:	FP-LYKJ 3U4HP PANEL ASSY		

Drawing Number:	Sh	Pg	THIRD ANGLE PROJECTION	
FPPU0304E139M0025	1	1		
REF NO:	MASS (kg)	0.0320	REV	

Approved by	Date	Name
Designed by	2021/7/15	Evan
Drawn by	2021/7/15	Dongyang, Li
Checked by	2021/7/15	Randy

WENT RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA
CONTAINS RESTRICTED INFORMATION.
THAT IS WENT PROPERTY.
DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY WENT.

默认线性公差表				
0	< X ≤	6	±0.1	
6	< X ≤	30	±0.2	
30	< X ≤	120	±0.3	
120	< X ≤	400	±0.5	
400	< X ≤	1000	±0.8	
1000	< X ≤	2000	±1.2	
角度公差±0.5°				

- 技术要求:
1. 尺寸单位为毫米。除非特别标出,线性尺寸公差为ISO 2768-M
下面要求除外:
+/-0.15 定制铣加工开孔特征距离参考轮廓
+/-0.1 任意开孔之间的距离
+/-0.1 开孔尺寸
形位公差参考 ISO 2768-K;
 2. 清除毛刺和锐利边;
 3. 所有标出尺寸仅为制造, 组装和检验。几何形状特征以CAD文件为准;
 4. 所有工艺过程和原材料应符合RoHS。